HIGH PRESSURE CLEANERS



PAGE INDEX

- 1. MD Series
- 2. MP 10
- 3. QMD Series
- 4. XMT 1000

PRACTICAL INFO.

Every product is delivered with an assortment of different sized nozzles shown in the preformance graphs below each product

READ PRODUCT CODE

IMPORTANT TERMS

HT - High temperatures


F - Explosion proof

OT - Oil tolerent

MD SERIES

High Pressure Cleaner



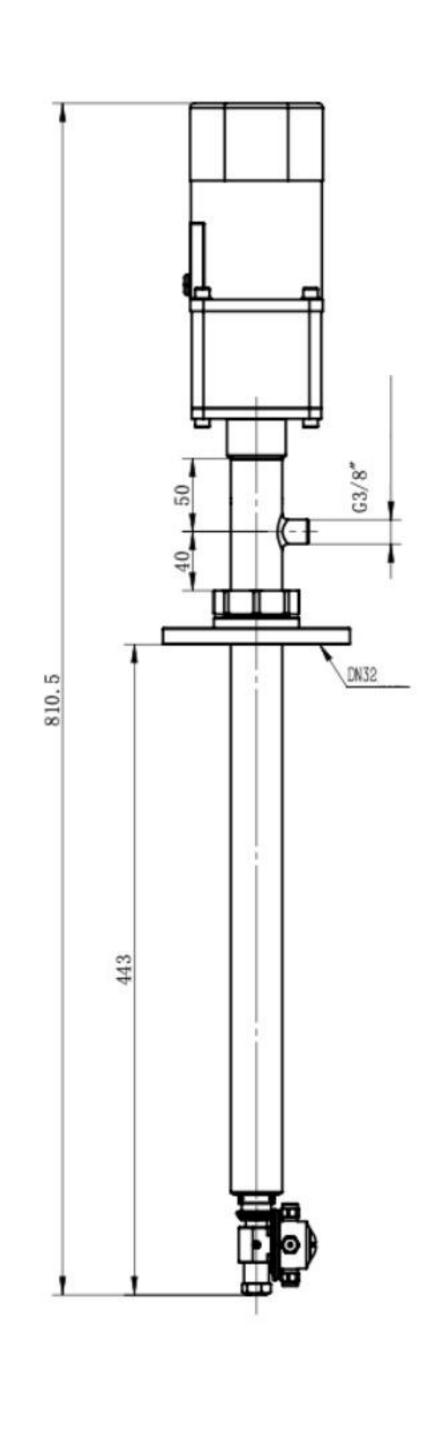



3-95c°
TEMPERATURE



3-100b PRESSURE



1-2m TANK DIAMETER



50-100mm MIN. HATCH SIZE



NOZZLES



EXC.NOZZLE SIZE



0,6 - 10,5m³/h 10- 175 L/MIN




3/4 BSPF CONNECTION



8-12 kg WEIGHT


DESIGN FEATURES

- Driven by DC24V/ 60W electric motor with external gears. The motor is IP65 and achieves 1400 r/pm
- Provides 360° impact coverage
- Liguid-saving dynamic seal. Only 3% waste
- Compact build ideal for small openings
- Mounting angle: Any direction
- Body: 316 SS

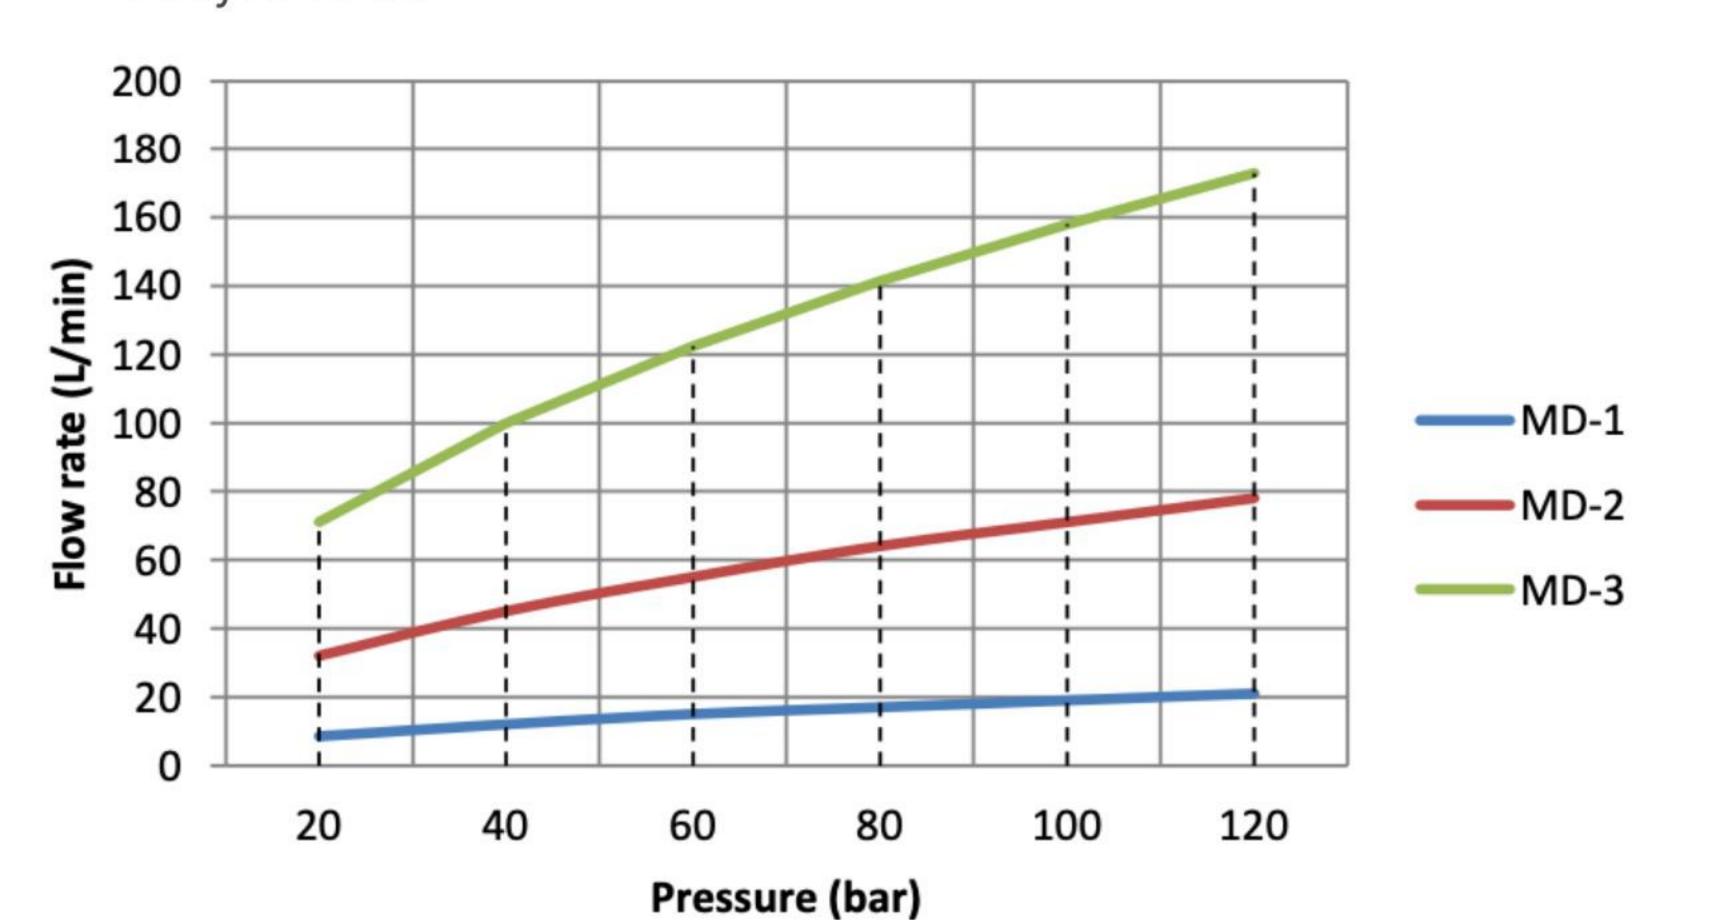


SPRAY PATTERN



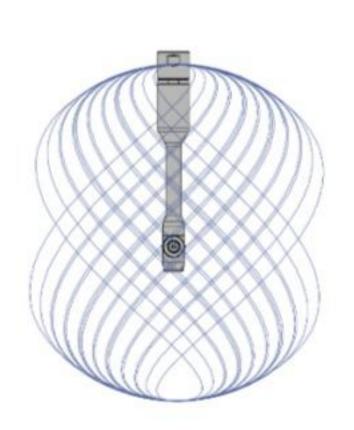

- Ceaning of large containers
- Commonly used in food, shipping and process industries
- Cleaning with foam/water for steam sterilisation
- Able withstand harsh chemicals

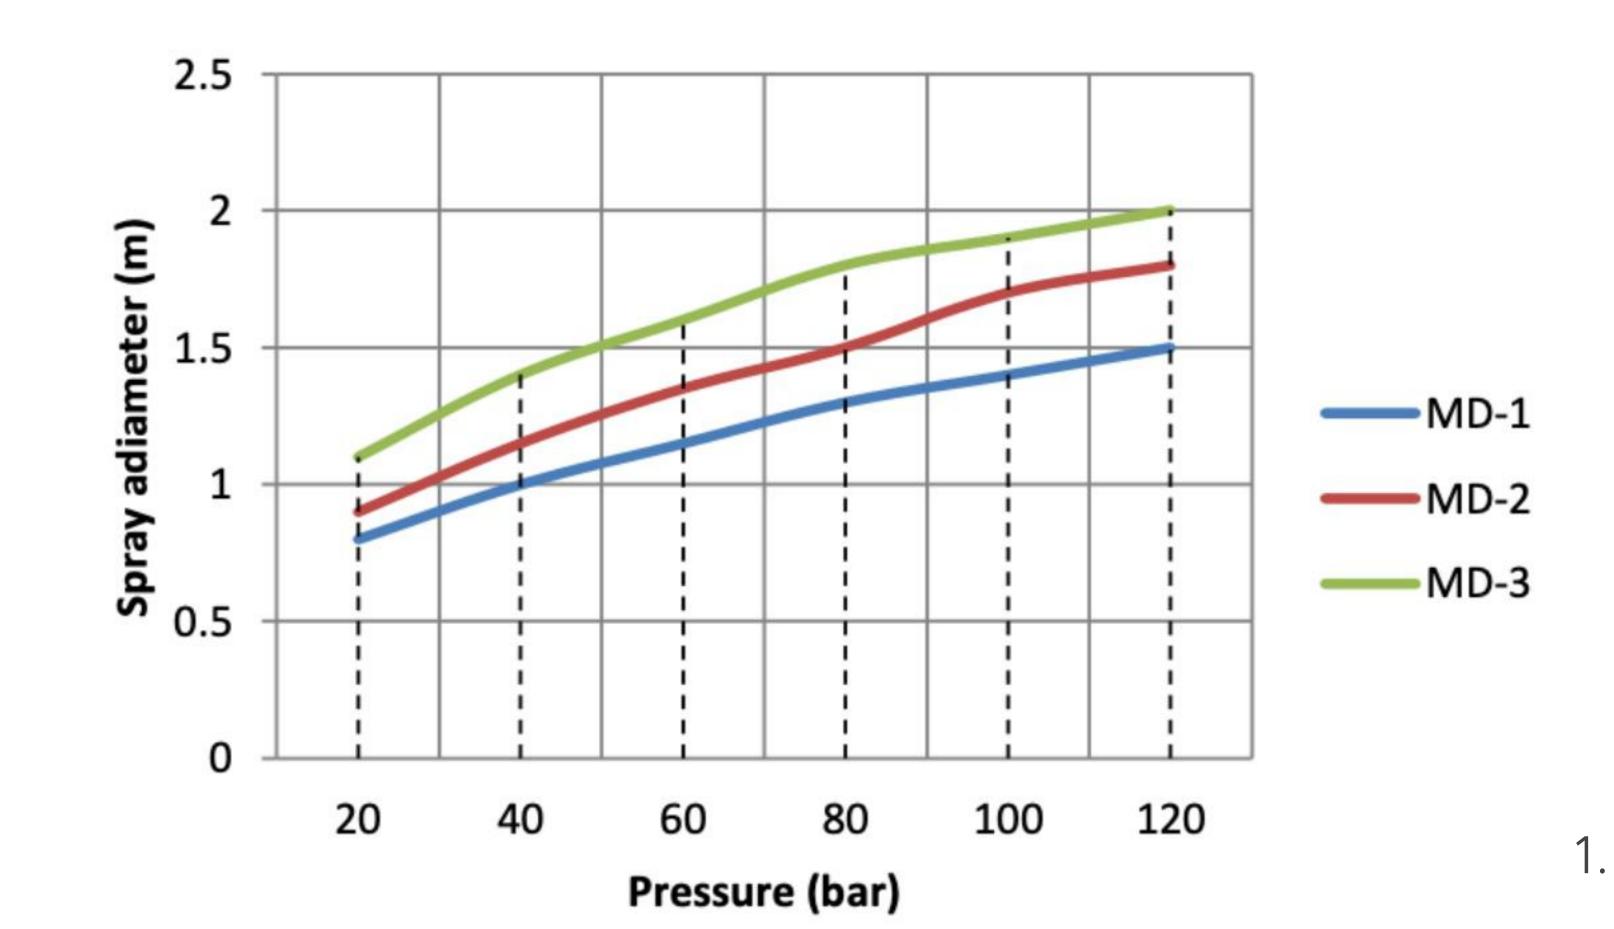


TerTech

MP10

High Pressure Cleaner



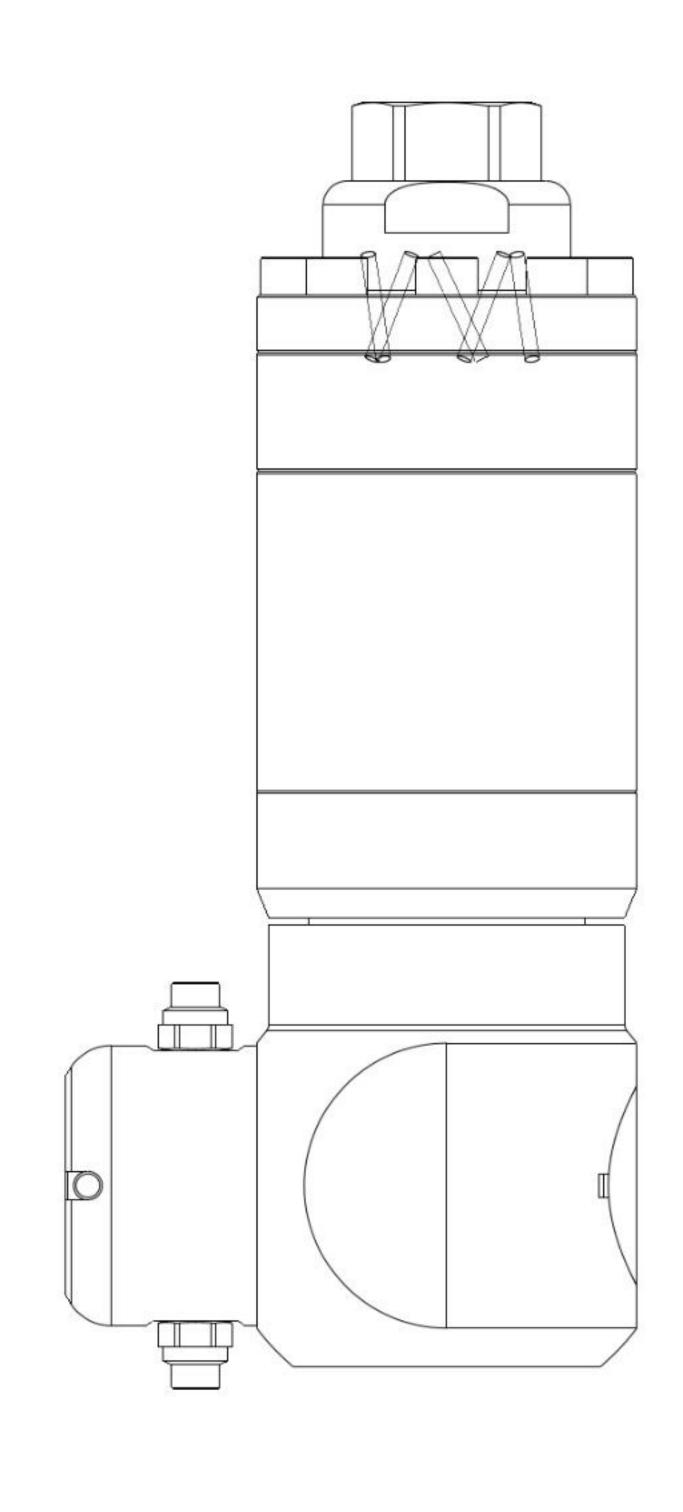




3-90c° TEMPERATURE



40-140b PRESSURE



1-10m TANK DIAMETER



56-79mm MIN. HATCH SIZE



4 NOZZLES



EXC.NOZZLE SIZE



1,5-4,5m³/h 25-75 L/MIN



3/4 BSPF CONNECTION




9 kg WEIGHT

DESIGN FEATURES


- High preformance at high pressures
- Driven and lubricated by the washing fluid
- Controlled rotation with low wear sliding bearings
- Mounting angle: Any direction
- Body: 316 SS
- Gaskets/bushings: 316 SS


SPRAY PATTERN



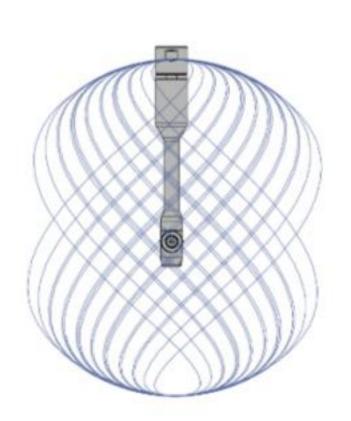

- Ceaning of large containers
- Commonly used in food, shipping and process industries
- Cleaning with foam/water for steam sterilisation
- Able withstand harsh chemicals

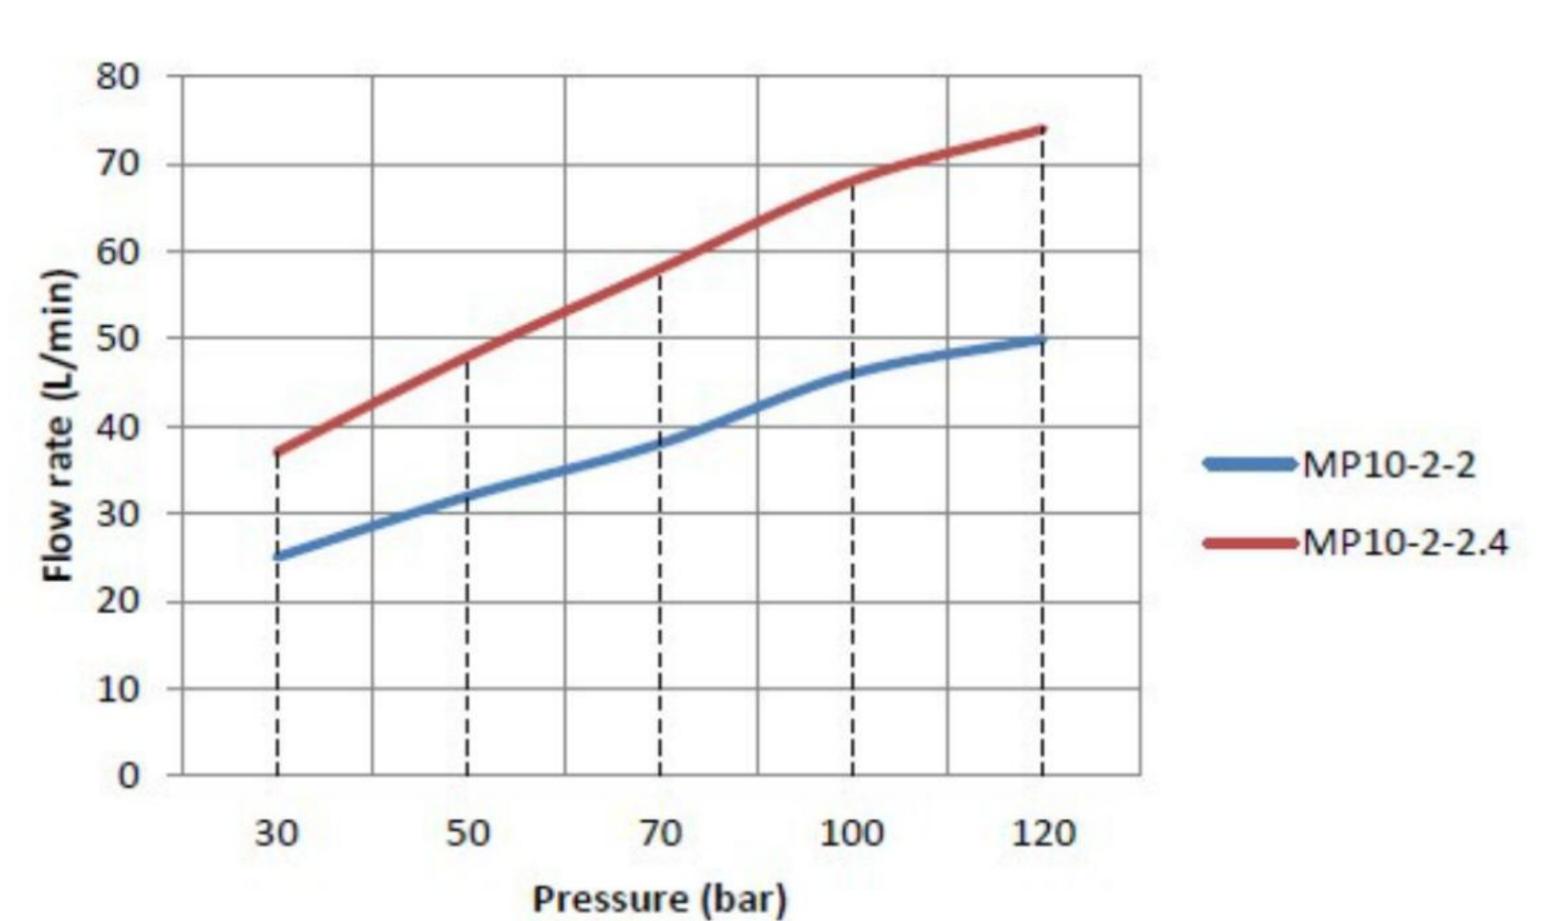

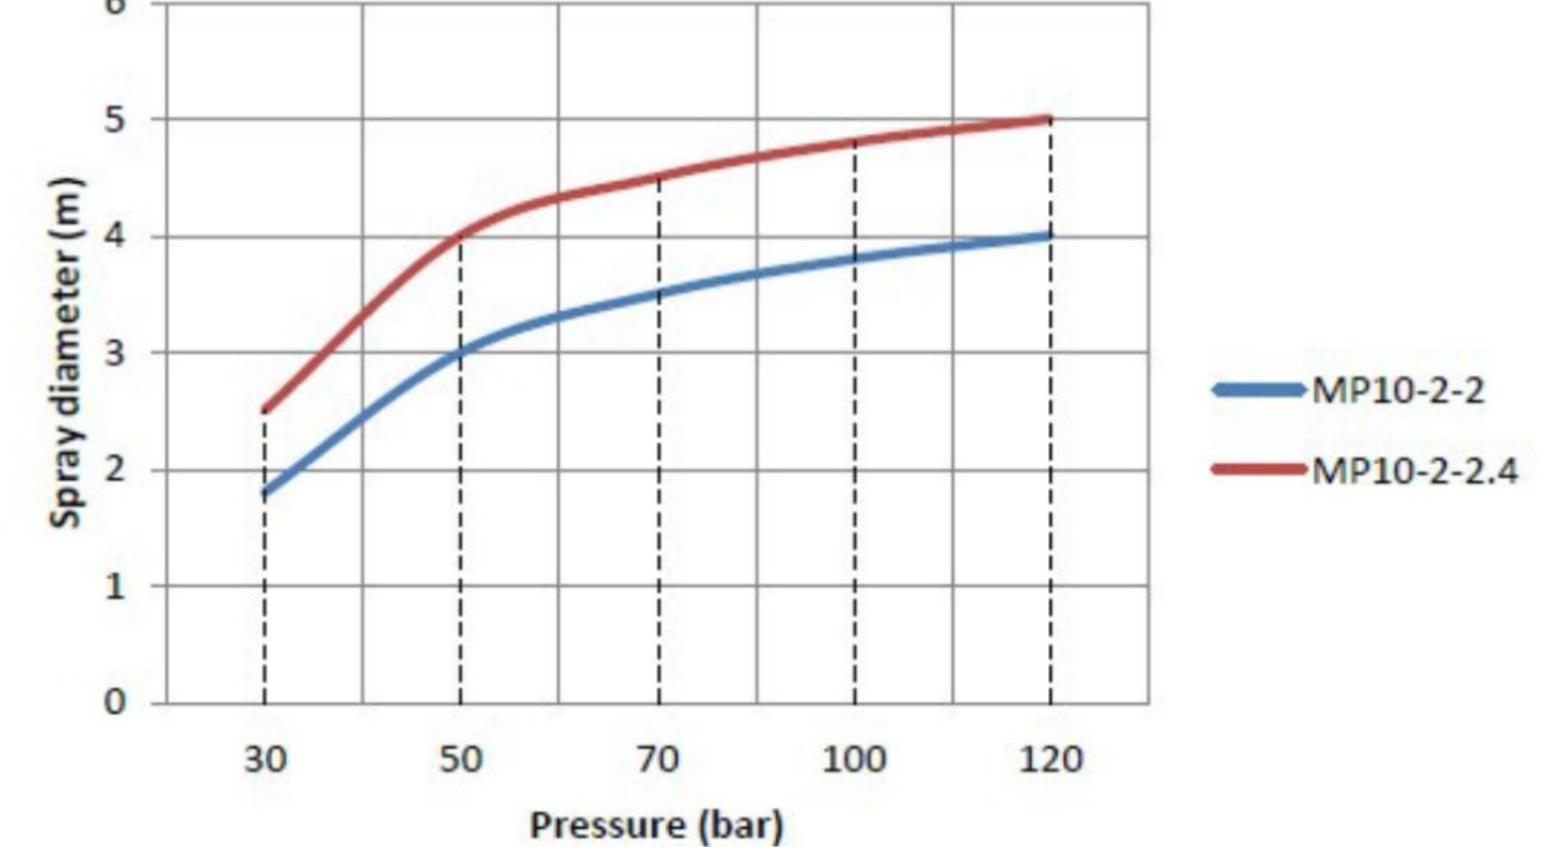

QIVID SERIES

High Pressure Cleaner










3-100b PRESSURE




1-2m TANK DIAMETER



50-100mm MIN. HATCH SIZE



NOZZLES



EXC.NOZZLE SIZE



0,6 - 1,2m³/h 10- 175 L/MIN



3/4 BSPF CONNECTION




8-12 kg WEIGHT

DESIGN FEATURES


- Driven by pneumatic motor with external gears.
- Provides 360° impact coverage
- Liguid-saving dynamic seal. Only 3% waste
- Compact build ideal for small openings
- Mounting angle: Any direction
- Body: 316 SS


SPRAY PATTERN



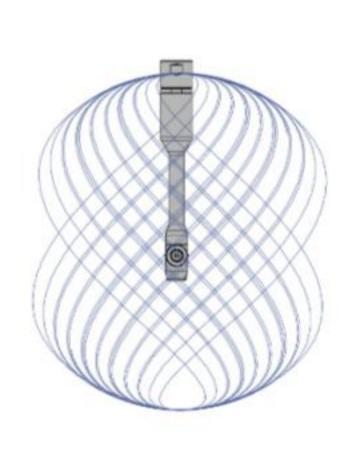

- Ceaning of large containers
- Commonly used in food, shipping and process industries
- Cleaning with foam/water for steam sterilisation
- Able withstand harsh chemicals

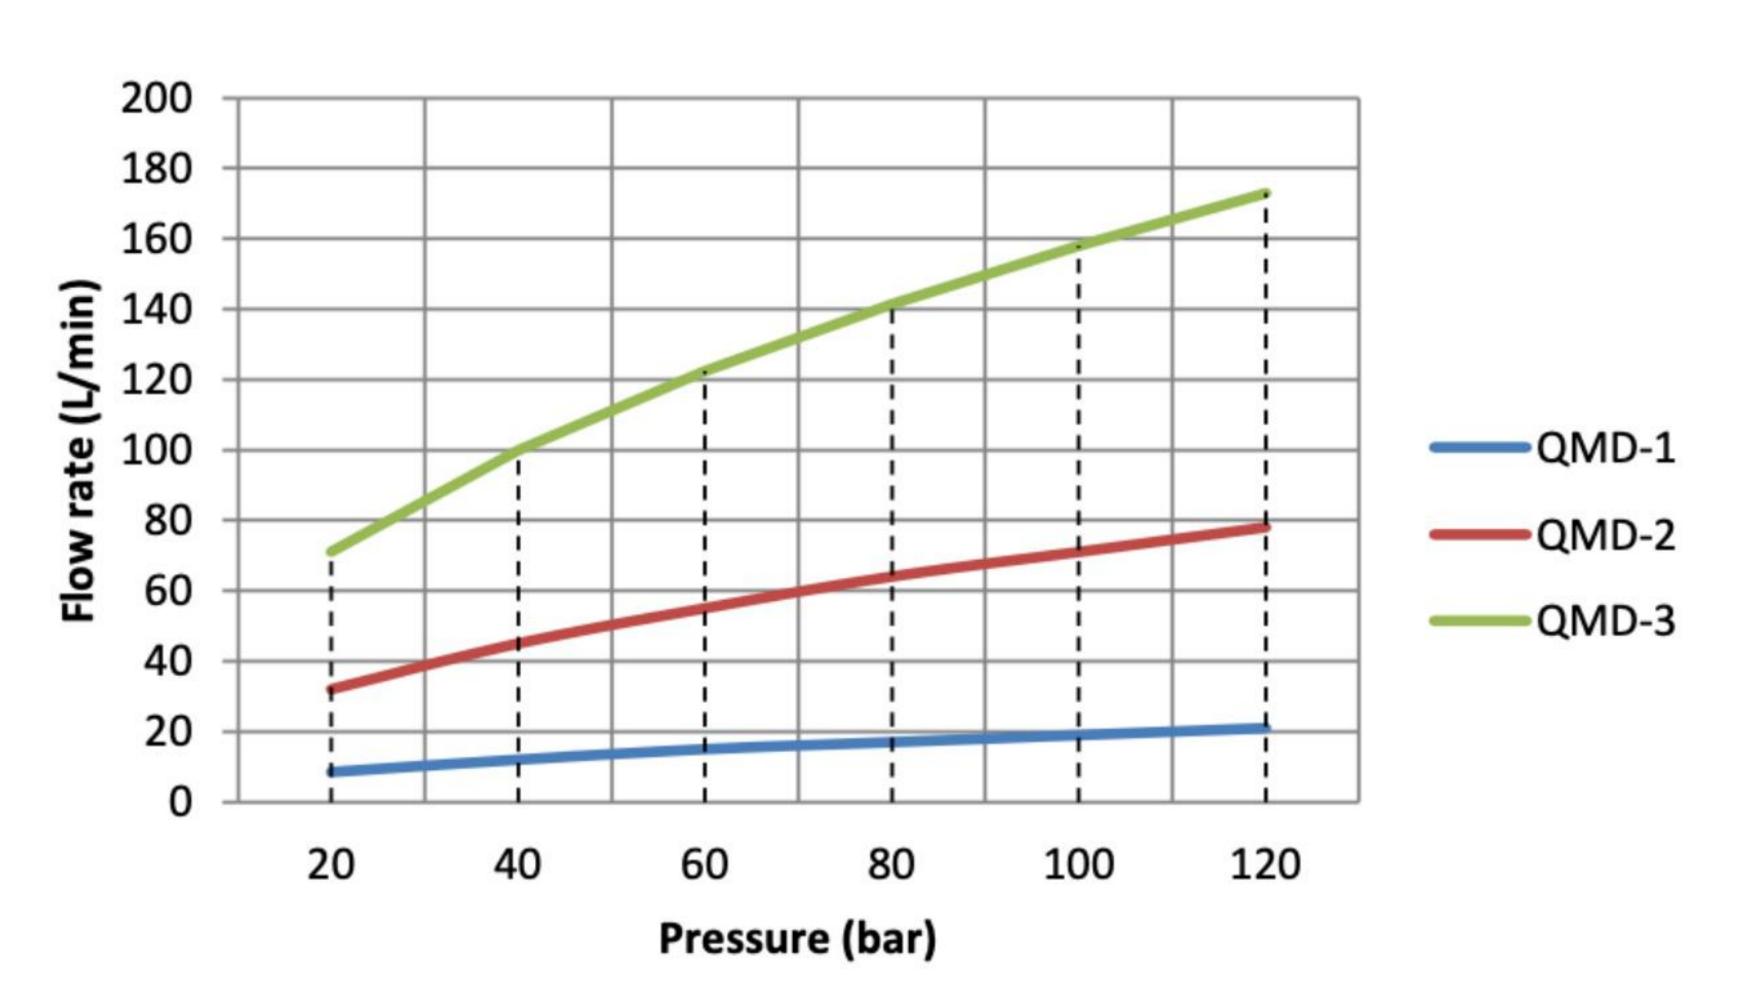


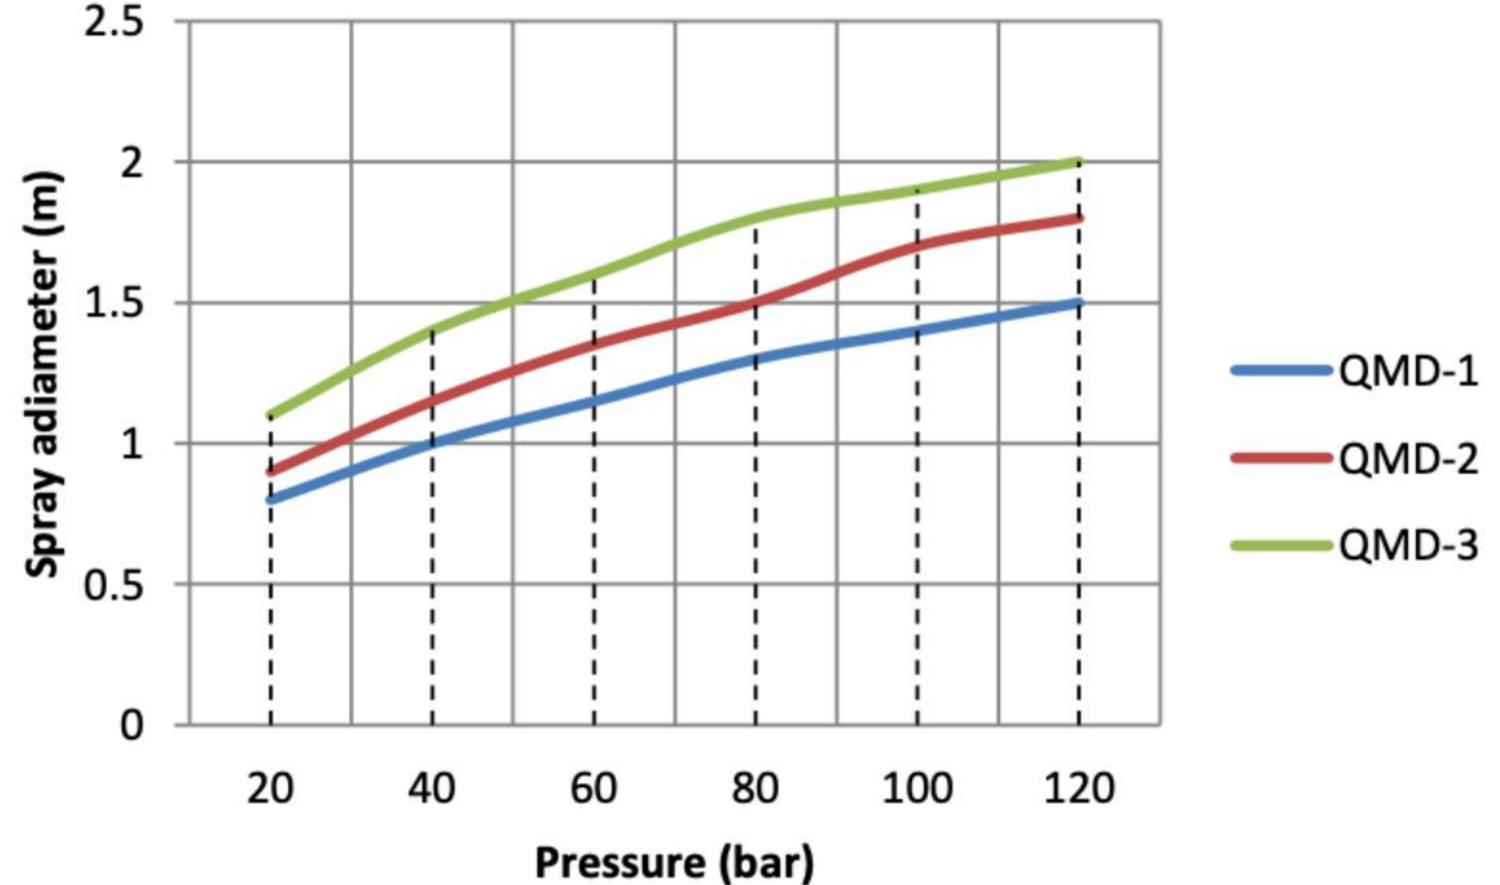

XIVIT 1000

High Pressure Cleaner



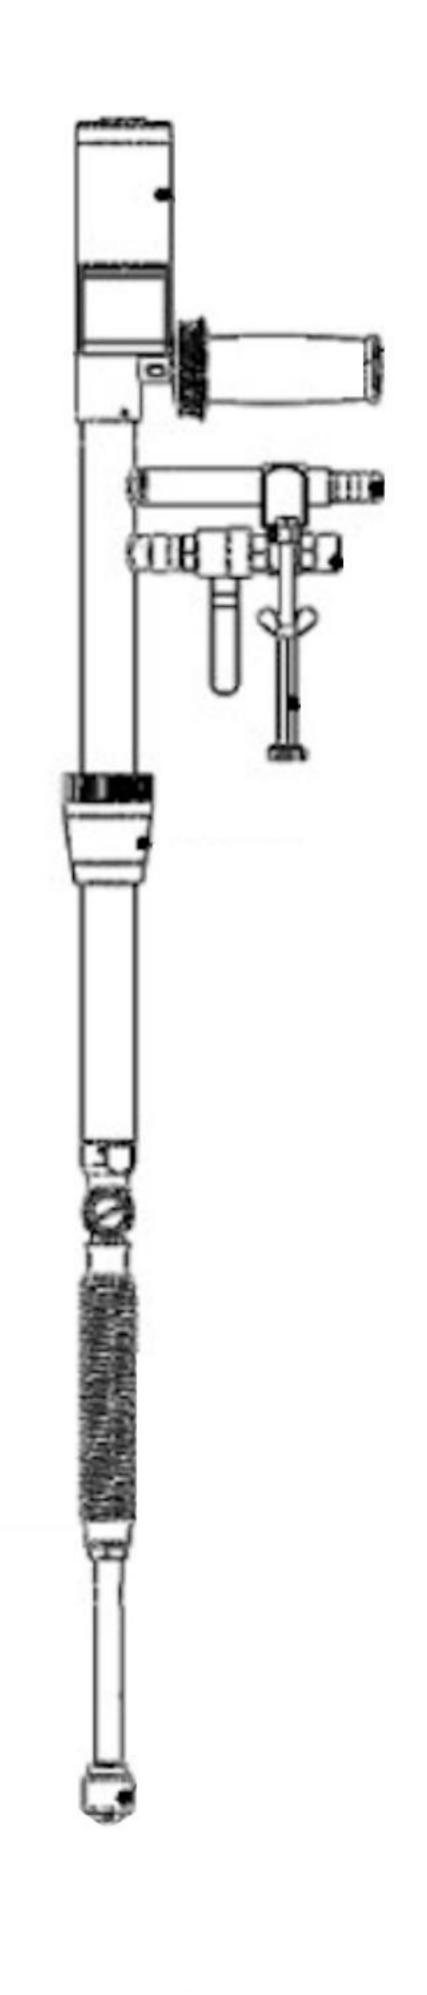



3-140c°
TEMPERATURE



3-100b PRESSURE




1-1,5m TANK DIAMETER



50-100mm MIN. HATCH SIZE



4 NOZZLES



EXC.NOZZLE SIZE



0,4 - 3,6m³/h7-60 L/MIN



3/8 BSPF CONNECTION




8-12 kg WEIGHT

DESIGN FEATURES

- Driven by external motor.
- Integrated suction system for removing dirty water
- Provides 360° impact coverage
- Compact build ideal for small openings
- Mounting angle: Any direction
- Body: 304/316 SS

SPRAY PATTERN

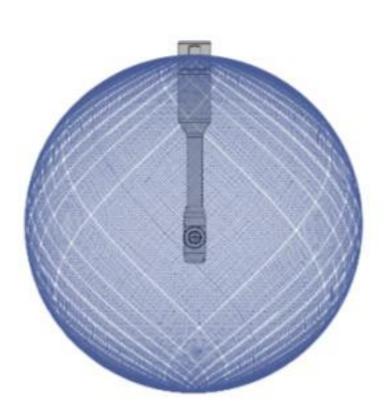



- Ceaning of large containers
- Commonly used in food, shipping and process industries
- Cleaning with foam/water for steam sterilisation
- Able withstand harsh chemicals